

**A**  
Hinges & pivots

**B34**  
Pulls & plates


**C**  
Flush bolts & coordinators

**D**  
Latches, catches & bolts

**E**  
Stops

**F**  
Exterior hardware

**G**  
Miscellaneous hardware

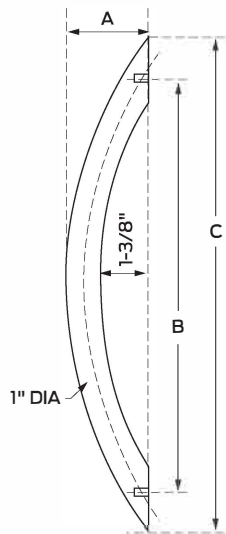

## 8700 Greenwich arc straight solid door pull

3/4" Round pull  
Available sizes: 9", 12", 18", 24"

### Certifications

Meets ANSI A156.06

### Mounting

- 1/4-20 mounting hardware
- Specify door thickness. Standard mounting hardware for door thickness of 1-1/2" to 1-3/4" unless otherwise specified. Accessory package available for 2" and 2-1/4" thick doors.
- Comes standard with thru-bolt screws and decorative washers.
- Optional mounting hardware available (see general information section for details) F, I, J, L, O, P
- Mounting hardware for other door thicknesses are available as engineering special, consult customer service.

Product number	Projection "A"	Clearance	Center to center "B"	Overall length "C"
8700-9	2-3/8"	1-5/8"	9"	12-9/16"
8700-2	2-3/8"	1-5/8"	12"	15-9/16"
8700-18	2-3/8"	1-5/8"	18"	21-9/16"
8700-24	2-3/8"	1-5/8"	24"	27-9/16"

### Finishes

- Available in Brass and Stainless Steel substrates. See general information section for specific BHMA finish code, finish description, US finish code, and substrate information.
- Standard finishes available; 605, 613, 619, 625, 626, 630, 643e/716, BLK
- Custom finishes are available as engineering special, consult customer service.


### Additional information

- Specify PR when ordering a set of pulls for back to back mounting
- For one back to back machined pull, specify Jsgl
- Custom lengths are available as engineering special, consult customer service.

### Mounting sizes


- All mounting hardware is for standard 1-3/4" door.
- Optional mounting hardware for 2" and 2-1/4" doors for many pulls. See pull detail for availability.
- Other mounting hardware sizes available as engineering special. Consult Customer Service.

### Thru-bolt mounts

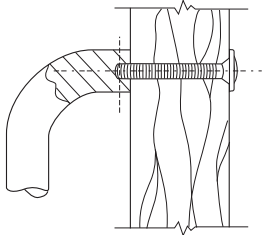


#### Standard mount

- Standard thru-bolt mount with countersunk washers
  - Hollow metal and wood door applications
- (2) Flat head mounting screws, plated to match
- (2) Countersunk washers, plated to match

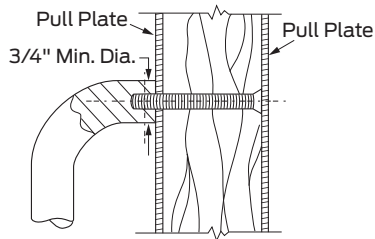


#### F Mount - Countersunk holes

- Used with countersunk holes in doors
  - Wood door applications
- (2) Flat head mounting screws, plated to match

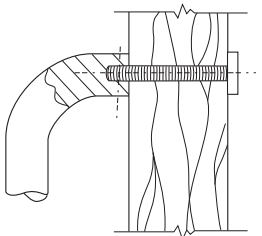


#### O Mount - Decorative

- Decorative thru-bolt mount
  - Hollow metal and wood door applications
- (2) Decorative mounting bolts - machine screw, plated to match



#### Q Mount - Decorative, glass doors

- Decorative thru-bolt mount
  - Glass door applications
- (2) Decorative mounting bolts - machine screw, plated to match
- (2) Metal and vinyl washers

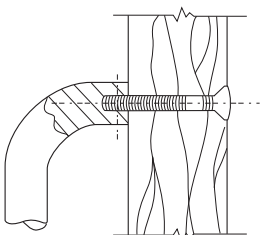

#### X Mount - Security

- Security thru-bolt mount with countersunk washers
  - Hollow metal and wood door applications
- (2) Flat head security pin in socket mounting screws, plated to match
- (2) Countersunk washers, plated to match

Hinges & pivots  
**A**

Pulls & plates  
**B5**

Flush bolts & coordinators  
**C**

Latches, catches & bolts  
**D**

Stops  
**E**


Exterior hardware  
**F**

Miscellaneous hardware  
**G**

## Mounting sizes


- All mounting hardware is for standard 1-3/4" door.
- Optional mounting hardware for 2" and 2-1/4" doors for many pulls. See pull detail for availability.
- Other mounting hardware sizes available as engineering special. Consult Customer Service.

## Concealed mounts

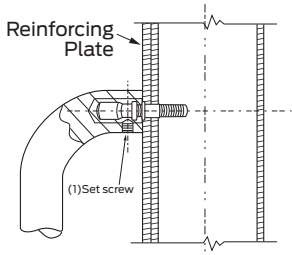


### A Mount - Aluminum doors

- Concealed mount
  - Aluminum door applications
- (2) Mounting bolts - machine screw
- (2) Set screws
- Designed to be used with rivet nuts. Not supplied.

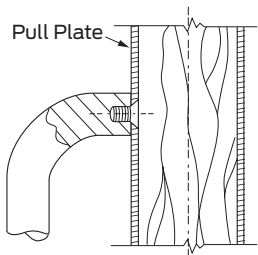


### G Mount - Pull plate

- Concealed mount with pull plate
  - Hollow metal and wood door applications
- Pull mounts directly onto plate, Plate is attached to door
- (2) Flat head mounting screws



### I Mount - Wood doors

- Concealed mount
  - Wood door applications
- (2) Mounting bolts - machine screw
- (2) Set screws

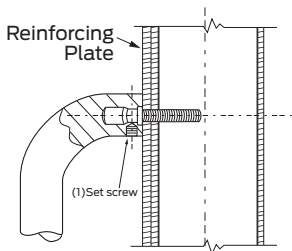

### L Mount - Hollow metal doors

- Concealed mount
  - Hollow metal door applications
- (2) Mounting bolts - machine screw
- (2) Set screws