

Pulls, push bars and plates

Long door pulls

8975

Rhodes straight solid door pull

Specifications

Available sizes	12"; 1 1/4" x 1/2" Flat pull with 3/4" round mounting posts
Material substrate	Made from solid aluminum, brass or stainless steel (304 Series)
Mounting hardware	<ul style="list-style-type: none"> ▪ Heavy duty mounting hardware exceeds industry standards ▪ 5/16"-18 mounting hardware ▪ Specify door thickness <ul style="list-style-type: none"> – Standard mounting hardware for door thickness of 1 1/2" to 1 3/4" unless otherwise specified – Accessory package available for 2" and 2 1/4" thick doors ▪ Comes standard with through bolt screws and decorative washers ▪ Optional mounting hardware available (see general information section for details) F, I, J, L, O, P ▪ Mounting hardware for other door thicknesses are available as engineering special, consult customer service
Certifications	Meets ANSI/BHMA 156.06

Dimensions

Product number	Projection "A"	Clearance	Center to center "B"	Overall length "C"
8975-2	2 1/4"	1 3/4"	12"	18"


Finishes

BHMA	Description	Substrate	Finish
628	Satin Aluminum, Clear Anodized	Aluminum	US28

Note: For other colors, consult factory.

Additional information

- Specify PR when ordering a set of pulls for back to back mounting
- For one back to back machined pull, specify JSGL (glass doors)
- Custom lengths are available as engineering special, consult customer service

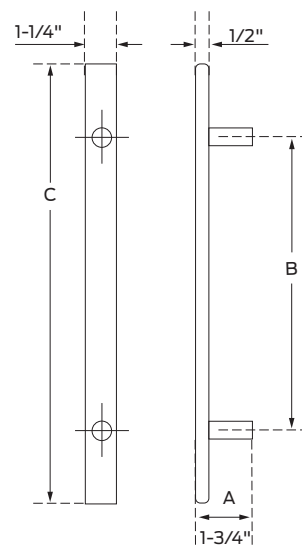

Pulls, push bars and plates


Architectural, decorative, long door pulls, push bars and plates

Mounting hardware

Mounting sizes


- All mounting hardware is for standard 1 3/4" door.
- Optional mounting hardware for 2" and 2 1/4" doors for many pulls. See pull detail for availability.
- Other mounting hardware sizes available as engineering special. Consult Customer Service.

Through bolt mounts




STD mount - Standard mount

- Through bolt mount with countersunk washers
- Hollow metal and wood door applications
- (2) 3/8-16 x 2 1/4" brass, flathead mounting screws, plated to match
- (2) 3/8-16 Countersunk washers, plated to match

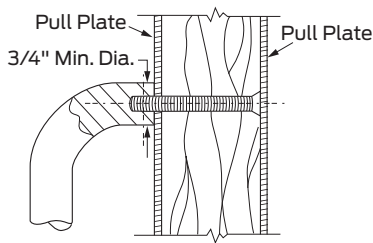


F mount - Countersunk holes

- Used with countersunk holes in doors
- Wood door applications
- (2) 2 1/4" steel flathead mounting screws, plated to match




O mount - Decorative

- Decorative through bolt mount
- Hollow metal and wood door applications
- (2) 3/8-16 x 2 1/4" Decorative mounting bolts - machine screw, plated to match



Q mount - Decorative, glass doors

- Decorative through bolt mount
- Glass door applications
- (2) Decorative mounting bolts - machine screw, plated to match
- (2) Metal and vinyl washers



X mount - Security

- Security through bolt mount with countersunk washers
- Hollow metal and wood door applications
- (2) Flathead security pin in socket mounting screws, plated to match
- (2) Countersunk washers, plated to match

Pulls, push bars and plates


Architectural, decorative, long door pulls, push bars and plates

Mounting hardware

Mounting sizes


- All mounting hardware is for standard 1³/₄" door.
- Optional mounting hardware for 2" and 2¹/₄" doors for many pulls. See pull detail for availability.
- Other mounting hardware sizes available as engineering special. Consult Customer Service.

Concealed mounts




A mount - Aluminum doors

- Concealed mount
- Aluminum door applications
- (2) Mounting bolts - machine screw
- (2) Set screws
- Designed to be used with rivet nuts (not supplied)




G mount - Pull plate

- Concealed mount with pull plate
- Hollow metal and wood door applications
- Pull mounts directly onto plate; plate is attached to door
- (2) 3/8" - 16 x 5/8" steel flathead mounting screws



I mount - Wood doors

- Concealed mount
- Wood door applications
- (2) Mounting bolts - wood screw
- (2) Set screws



L mount - Hollow metal doors

- Concealed mount
- Hollow metal door applications
- (2) Mounting bolts - machine screw
- (2) Set screws

Pulls, push bars and plates

Architectural, decorative, long door pulls, push bars and plates


Mounting hardware

Mounting sizes

- All mounting hardware is for standard 1 3/4" door
- Optional mounting hardware for 2" and 2 1/4" doors for many pulls (see pull detail for availability)
- Other mounting hardware sizes available as engineering special (consult Customer Service)


Back to back pull mounts

Specify the below back to back mounting options to receive a pair of the model specified (2).

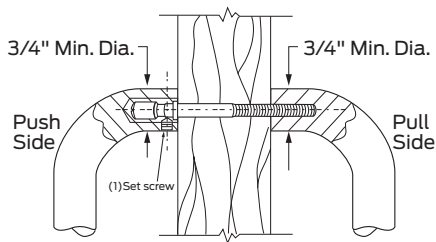


J mount - 8102 Pull only

- Back to back mounting - 5/16-18 hardware
- Hollow metal and wood door applications
- (2) Mounting bolts - machine screw
- (2) Set screws

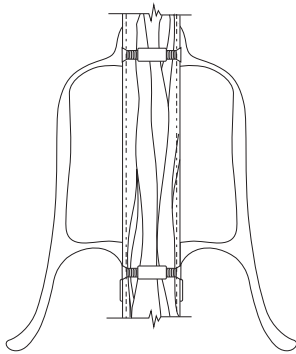


K mount - 8121 Pull only

- Back to back mounting - 8-32 hardware
- Hollow metal and wood door applications
- (8) Machine screws
- (4) Mounting sleeves

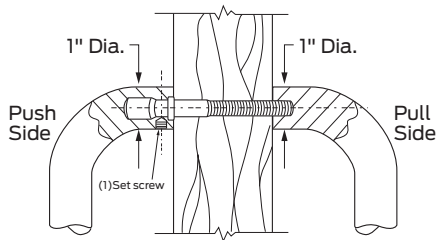

N mount

- Back to back mounting - 3/8-16 hardware
- Hollow metal and wood door applications
- (2) Mounting bolts - machine screw
- (2) Set screws

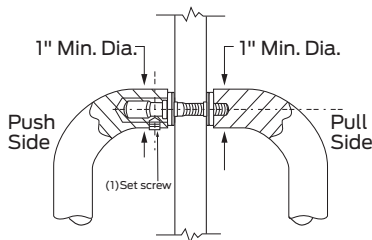

P mount - Glass doors

- Back to back mounting - 3/8-16 hardware
- Glass door applications
- (2) Mounting bolts - machine screw
- (2) Set screws
- (2) Metal and vinyl washers