


## Latches, catches and bolts

### Surface bolts

# SB1600M1/SB1600M2

#### Surface bolt

- Standard surface bolt has 3 1/2" throw for maximum security and for doors with larger undercuts
- Sleek handle design
- Ideal for all types of doors
- Fully concealed mounting prevents vandalism
- Available in locking version. Unit locks in both the up and down position
  - Locking bolts are furnished with 2 keys in 4 keying variations
- Units packed with wood and machine screws to meet most field conditions
- M1 version has Actuator tab pointing away from the door
- M2 version has Actuator tab pointing towards the door

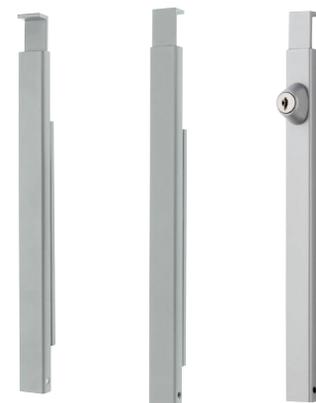

SB1600M1 SB1600M2 SB1600M2-TL



Optional flat  
bottom strike



Optional  
universal strike



#### Specifications

Material substrate	Constructed of heavy duty steel
Certifications	Meets ANSI/BHMA A156.16 L84161 and UL10C Listed (3 hour) fire doors up to 8'0"

#### Dimensions

Bar	Top strike	Bottom strike
11" L x 3/4" W x 3/4" T, locking version 1 1/2" thick	1 1/4" W x 7/8" T x 15/16" D	3" L x 1" W x 1/8" T

#### Strike options

- **T** Top strike only
- **B** Bottom strike only
- **TL** Top locking strike only
- **BL** Bottom locking strike only

#### Key code

- 1289 Standard key code
- 1360
- 1390
- 1395

#### Finishes

BHMA	Description	Substrate	Finish
631	Matte Black	Steel	BLK
689	Aluminum Painted	Steel	SP28
691	Dull Bronze Painted	Steel	SP10
695	Dark Bronze Painted	Steel	SP313
706	Dull Brass Painted	Steel	SP4

For other colors, consult factory.

#### Available accessories

- Security pin screw
- Through bolts available
- End plug and end plug stud package
- Cylinder package
- Replacement strike packages