

Pulls, push bars and plates

Vandal resistant trim

VR910M-DT/VR914M-DT

Vandal resistant mortise dummy trim (models with and without black grip)

- VR910M-DT with black grip, VR914M-DT without black grip
- Closed pull design eliminates a hooking point to be able to forcibly pull a secured door open
- Ligature resistant design
- For use with Von Duprin 9875/9975 mortise lock exit device
- Built-in lock protector prevents tampering
- Non-handed

Specifications

Available sizes	11 Gauge (0.120" thick)
Material substrate	304 Series stainless steel standard, exceeding industry standards for corrosion resistance. Recommended for external applications.
Mounting hardware	<ul style="list-style-type: none">▪ For door thickness 1 3/4"-2 1/4"<ul style="list-style-type: none">- 10-24 X 1" and 10-24 X 1 1/2" mounting screw size▪ Can be mounted directly to Von Duprin 9875/9975 device▪ Standard mounting - Welded studs fasten with pan head screws on opposite side of door▪ Optional through bolt mounting - bolt through face of trim into device for added security

Dimensions


Width	Height	Through bolt pattern (4 holes)	Clearance grip to door	Projection
7 1/4"	11"	1 3/8" wide x 7" high	1 1/2"	1 7/8"

Finishes

BHMA	Description	Substrate	Finish
630	Satin Stainless	Stainless steel	US32D

Models are available with or without attractive black plastisol edge grip.

Custom finishes are available as engineering special, consult customer service.

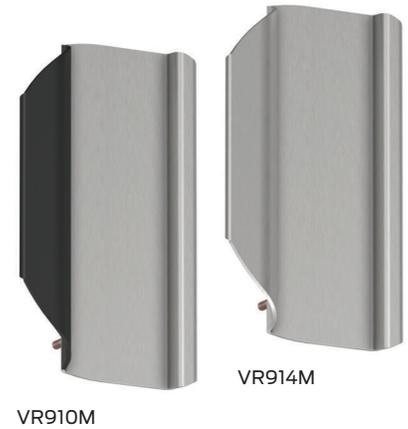

VR910M

VR914M